

# SP - Comfort

For application rates at 550 l/h.

Silaspray Europe GmbH  
Areal E / Kunststoffstr. 3 • 06749 Bitterfeld-Wolfen  
Phone: +49(0) 34 93 - 7 36 77 • Fax: +49(0) 34 93 - 7 36 78  
eMail: [info@silaspray.de](mailto:info@silaspray.de)

Applicators

SILASPRAY®

Data Sheet

## SILASPRAY SP Comfort

References:

SILASPRAY SP Comfort

For the application of:

- liquid biological or chemical silage additives (NO strong organic acids)
- on pick-up wagons/trucks, balers and forage harvesters

Application rates (min. - max.):

- approx. 30 to 550 l/h
- max. 3 bar

Technical Data:

electric Pump 12V DC/15A

Delevery:


The system consists of a tank or a suction pipe assembly, a pump-and-filter unit with turbine flow meter, an electronic control unit with display, 5 m of 1/2" hose, set of two nozzles, fastening material. Optional pick-up switch or - relais.

Additional information:

- Electronic control / activation of the pump
- Digital display of the current flow rate as well as 2 integrated memory stores ,which, if necessary may be reset to zero.

Optionally available for this system:

100 L-Tank  
200 L-Tank  
300 L-Tank  
Pick-Up-Switch

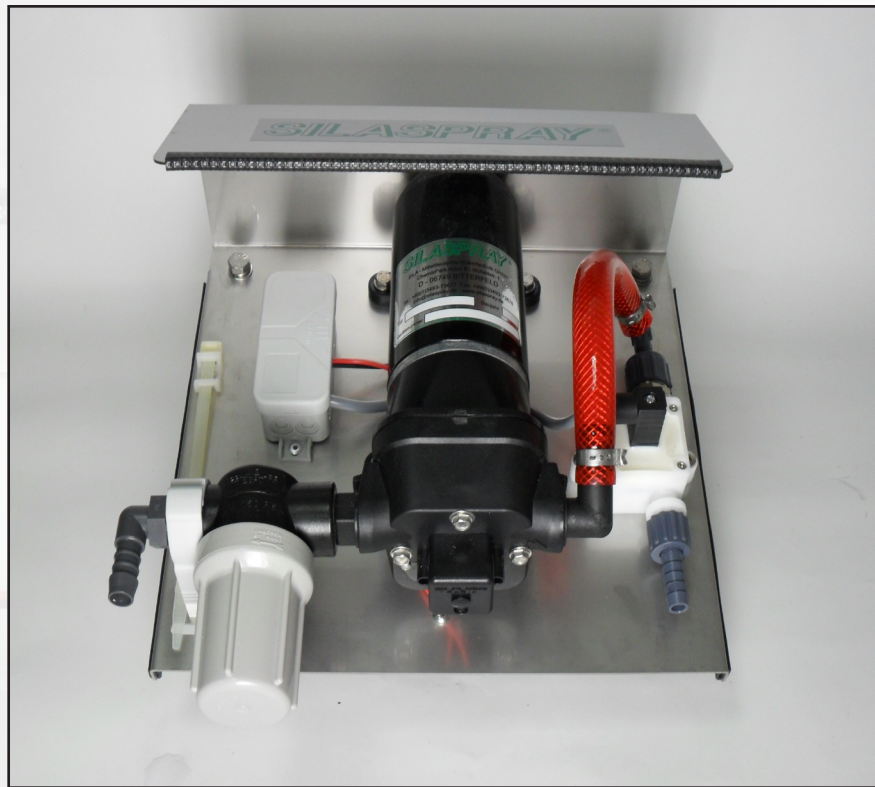

**!!! Do not use for strong acids !!!**

[www.silaspray.de](http://www.silaspray.de)

Silaspray Europe GmbH  
Areal E / Kunststoffstr. 3 • 06749 Bitterfeld-Wolfen  
Phone: +49(0) 34 93 - 7 36 77 • Fax: +49(0) 34 93 - 7 36 78  
eMail: [info@silaspray.de](mailto:info@silaspray.de)